




Borderview Farm Hopyard Construction Costs (0.75 acre)

Item	Amount	Cost
5/16 cable	6750 ft	\$ 1,850
Poles	65	\$ 2,098
Turnbuckle, 3/4" x 12"	37	\$ 589
4' ground anchors	40	\$ 560
Haven Grips cable pullers	2	\$ 166
Cable cutter	1	\$ 66
Cable clamps	300	\$ 197
Stone (to secure posts)	10 yards	\$ 460
Total material costs		\$ 5,985
Hydraulic post hole digger rental		\$ 339
Labor	65 man hours	
Tractor and lift	32 hours	
Tractor and loader to set poles	13 hours	
Tractor and auger to set anchors	3 hours	

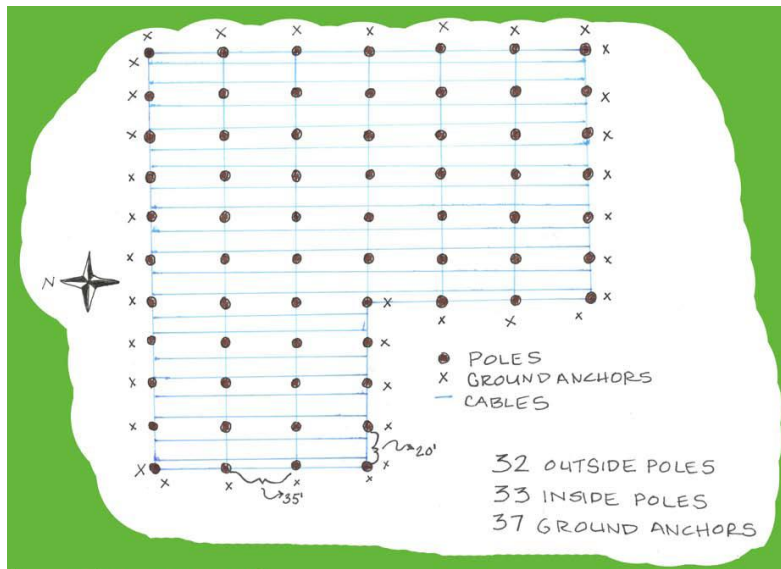

UVM Extension helps individuals and communities put research-based knowledge to work.

Any reference to commercial products, trade names, or brand names is for information only, and no endorsement or approval is intended.

Issued in furtherance of Cooperative Extension work, Acts of May 8 and June 30, 1914, in cooperation with the United States Department of Agriculture. University of Vermont Extension, Burlington, Vermont. University of Vermont Extension, and U.S. Department of Agriculture, cooperating, offer education and employment to everyone without regard to race, color, national origin, gender, religion, age, disability, political beliefs, sexual orientation, and marital or familial status.

